



Banner

TRACTION BULL BLOC DB

Bloc Dry Bull GEL

Banner Traction Bull Bloc GEL batteries are sealed, valve regulated lead batteries containing an electrolyte gel. These block batteries are especially suitable for difficult tasks in the small traction sector. The DB GEL Bloc is characterised by its robustness, versatility of application and maintenance free design.

Other advantages include long service life and a high level of cyclical resistance. DB GEL Bloc batteries are mainly employed in the rehabilitation sector, golf caddies, cleaning machines, etc.

Features

- Block batteries, 6V and 12V rated voltage
- Maintenance free for entire service life
- Recommended temperature range of 20°C
- Low self-discharge
- Corrosion-resistant terminal design
- Non-hazardous according to FAA and IATA

Design

- Positive electrode
Lead/calcium, high-performance grid with pasted active mass
- Negative electrode
Lead/calcium, high-performance grid with pasted active mass
- Microporous, synthetic separator
- Casing material
Polypropylene
- Electrolyte
Extremely pure sulphuric acid bound into a gel
- Terminal design
Electrolyte-tight, sealed safety terminal
- Cell connections
Interior welding through the casing wall
- Cell plug
Safety valve with an overpressure ventilation system








Banner

TRACTION BULL BLOC DB

Type	Part number	V	Capacity in Ah		Dimensions in mm (l x w x h)	Terminal	Polarity	Weight
			5 Std.	20 Std.				
Dry Bull DB 6/160 BS	040511750306	6	147	180	261 x 181 x 276	DT	0	31
Dry Bull DB 6/180 DS	04051DB6180	6	180	220	244 x 190 x 275	AP	0	32
Dry Bull DB 6/240	04051DB6240	6	240	280	302 x 178 x 369	AP	0	45
Dry Bull DB 24	040510240612	12	22,5	24	167 x 176 x 126	LT5	0	9,6
Dry Bull DB 31	040510310612	12	26,8	31,6	211 x 130 x 184	T 874	1	10,6
Dry Bull DB 40	040510400612	12	33,5	38	210 x 175 x 175	AP	0	14,4
Dry Bull DB 40 FT	04051040FT	12	34	40	197 x 168 x 175	FT	0	14,4
Dry Bull DB 52	040510520612	12	43,2	50	238 x 140 x 235	T 881	1	16,8
Dry Bull DB 55	040510550612	12	44	55	261 x 135 x 230	AP	0	19
Dry Bull DB 60	04051DB060	12	47	56	278 x 175 x 190	AP	0	21
Dry Bull DB 60 FT	04051060FT	12	47,4	60	259 x 169 x 178	FT	0	17,7
Dry Bull DB 72 FT	040510720612	12	63	73,6	260 x 171 x 210	FT	1	23,8
Dry Bull DB 80	04051DB080	12	72	80	350 x 175 x 190	AP	0	28
Dry Bull DB 85	040510850612	12	72	86,4	324 x 171 x 236	DT	1	28,7
Dry Bull DB 100	040511000612	12	80,5	97,6	329 x 171 x 238	DT	1	31,8
Dry Bull DB 120	04051DB120	12	105	120	329 x 170 x 282	AP	0	42
Dry Bull DB 125	04051DB125	12	110	125	515 x 190 x 225	AP	3	45
Dry Bull DB 150	04051DB150	12	132	150	512 x 222 x 221	AP	3	54
Dry Bull DB 180	040511800612	12	152,5	183	527 x 216 x 254	AP	4	57,6
Dry Bull DB 210	04051DB210	12	177	210	512 x 276 x 240	AP	3	67
Dry Bull DB 220	040512200612	12	188	220	527 x 279 x 254	AP	4	71,2

The given electrical values are valid for loads in a fully charged condition and an ambient temperature of 20°C.

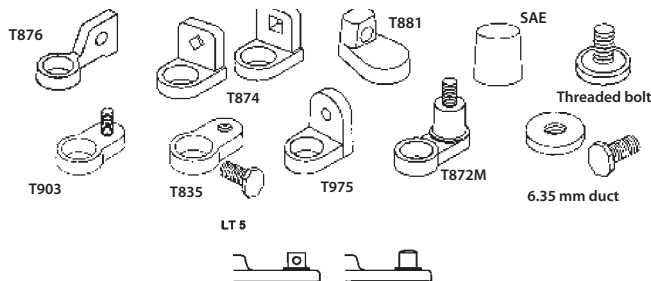

Traction Bull Bloc GEL batteries may only be charged with special voltage controlled chargers. Standard chargers can destroy the battery. The charge voltage must be adjusted to the type of application in accordance with our data sheets.

All figures relating to dimensions and weight are subject to the standard production tolerances. The electrical values are approximate. Our products are subject to ongoing development, therefore we retain the right to make changes without an obligation to inform.

A: Banner GmbH, A-4021 Linz, Banner Straße 1,
Tel. 0732/3888-0, Fax 0732/3888-21598, e-mail: office@bannerbatterien.com

GB: Banner Batteries (GB) Ltd., Units 5-8 Canal View Business Park, Wheelhouse Road, Rugeley,
Staffordshire WS15 1UY, Tel. +44/ (0)1889/ 57 11 00, Telefax +44/ (0)1889/ 57 73 42,
e-mail: office.bgb@bannerbatteries.com

Presented by:

Banner
THE POWER COMPANY